

A1V & A2V Aluminum Ground Mount




Advantages

- Easy installation
- Safety and reliability
- Cost saving
- Artistic style
- High class anodized

Technical Data

- Installation site: Open field ground mount
- Foundation: Ground screw foundation & Concrete foundation
- Mount tilt angle: 0-45 Degree
- Wind velocity: Up to 60m/s
- Snow load: Up to 1.4KN/M²
- Main component: AL6005-T5
- Accessories: SUS 304 screws
- Duration: More than 30 years

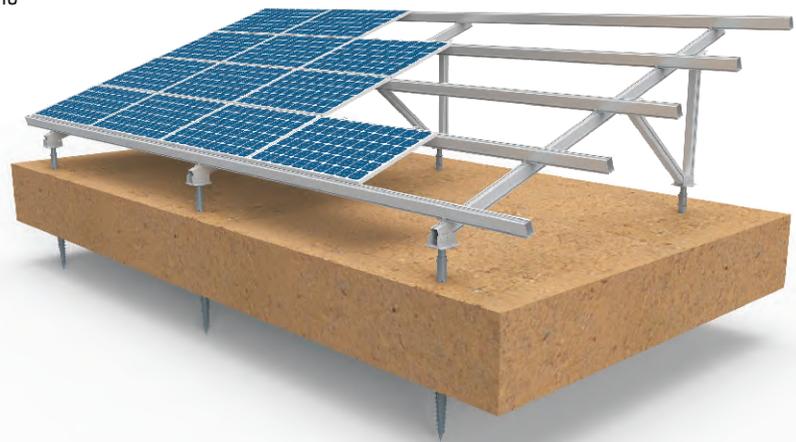

Main Components:

1V-Rack



2V-Rack



Rail 19



Rail splice



Rail fastening block



End-clamp



Mid-clamp



Rail cap

