


JASOLAR



www.jasolar.com

Specifications subject to technical changes and tests.
JA Solar reserves the right of final interpretation.

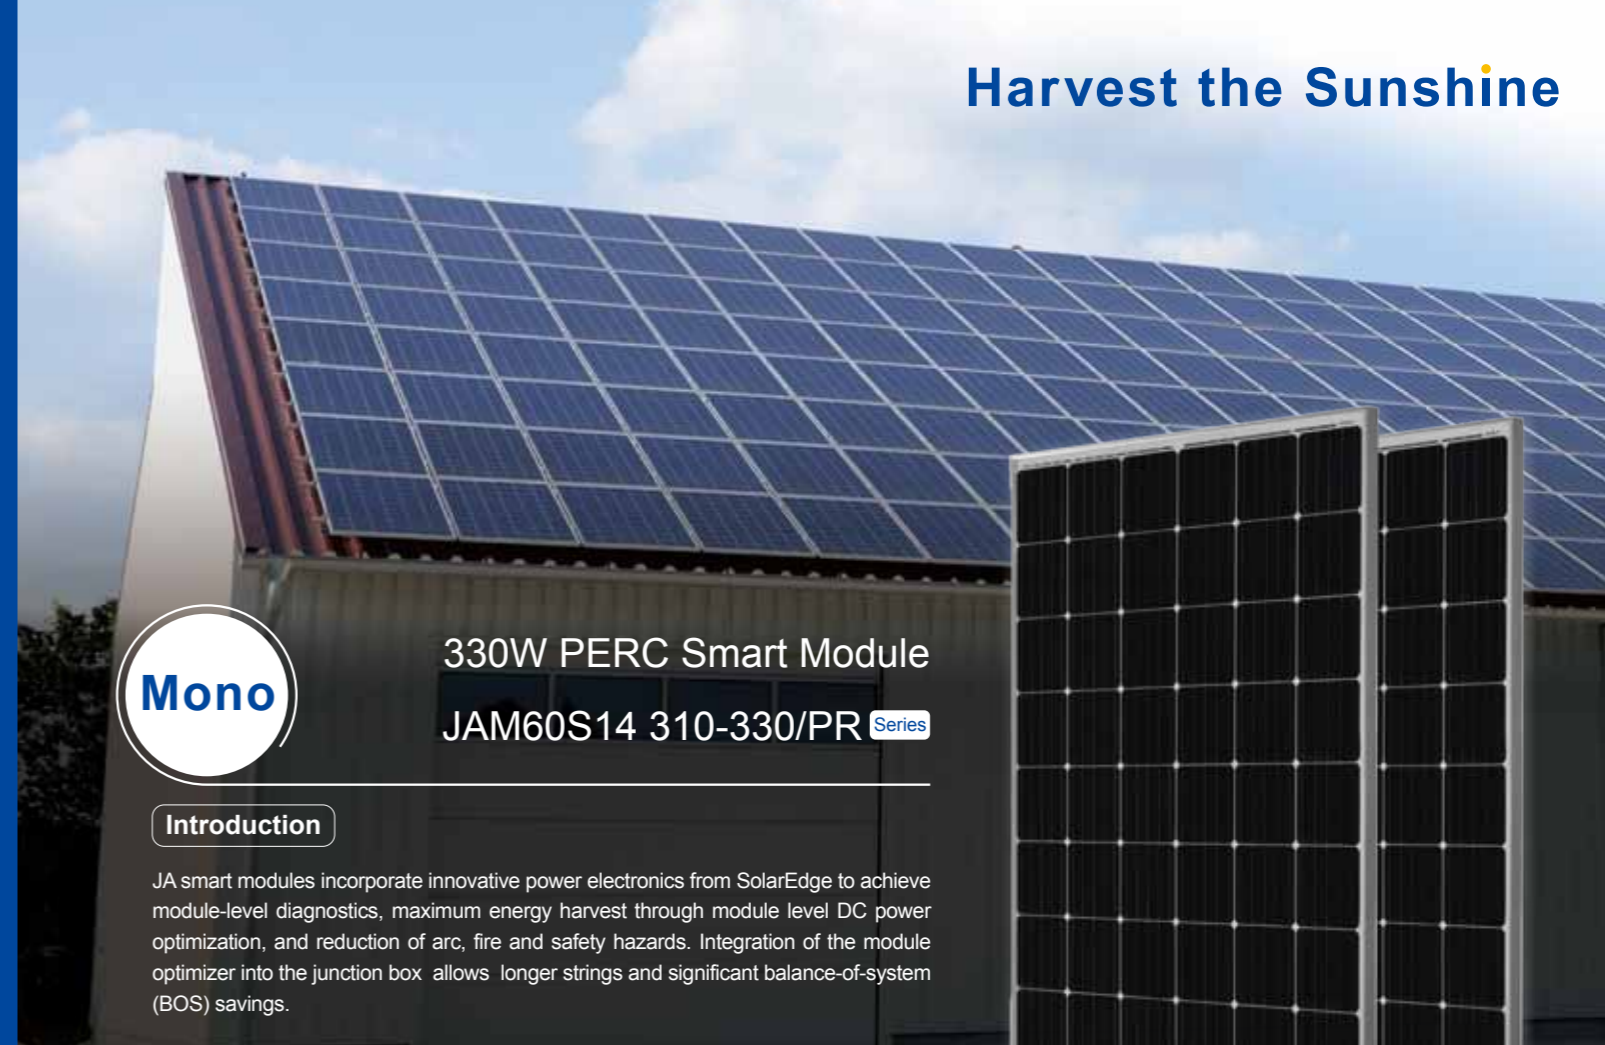

Mono

330W PERC Smart Module
JAM60S14 310-330/PR Series

Introduction

JA smart modules incorporate innovative power electronics from SolarEdge to achieve module-level diagnostics, maximum energy harvest through module level DC power optimization, and reduction of arc, fire and safety hazards. Integration of the module optimizer into the junction box allows longer strings and significant balance-of-system (BOS) savings.



Safer solar



More efficient O&M




Flexible system assembly



Maximized energy Harvest

Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

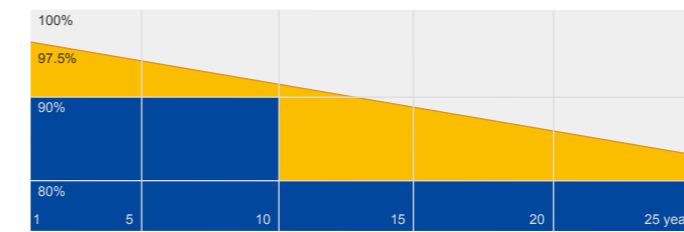

■ JA Linear Power Warranty ■ Industry Warranty


Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- OHSAS 18001: 2007 Occupational health and safety management systems
- IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules – Guidelines for increased confidence in PV module design qualification and type approval



SYSTEM ARCHITECTURE

JA smart system components work together with any inverter to maximize energy harvest. JA smart modules can communicate by electrical line, allowing users to monitor system performance in real time.

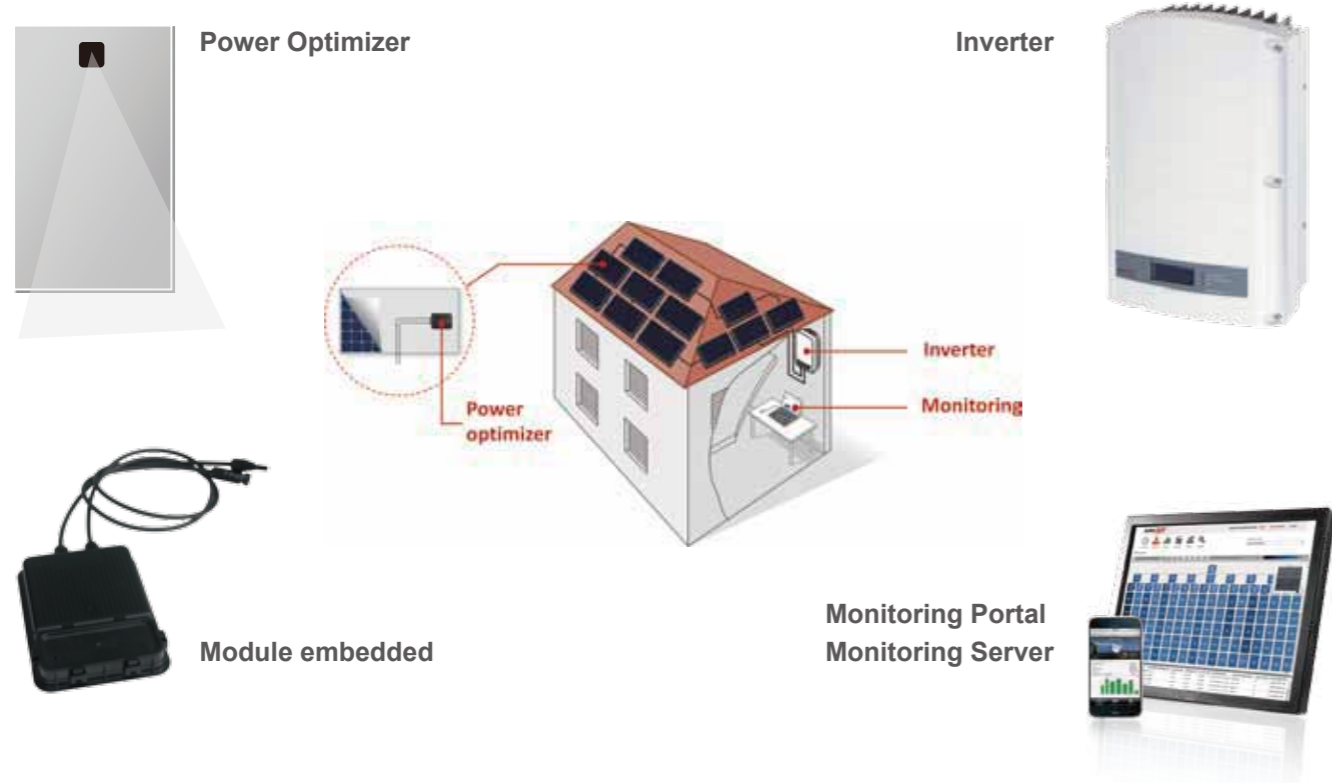

STRING LENGTHS(computed automatically by SolarEdge Site Designer)

Module Power	310	315	320	325	330
MINIMUM string size with SolarEdge inverter	1ph		8		
	3ph		16		
	3ph-MV		16		
MAXIMUM string size with SolarEdge inverter	1ph	16	16	16	15
	3ph	36	35	35	34
	3ph-MV	41	40	39	39
String size with Non-SolarEdge	According to inverter design rules				

OUTPUT VOLTAGES AND CURRENTS


Operating Output Voltage when connected to SolarEdge Inverter	5-60	Vdc
Operating Output Voltage when connected to Non-SolarEdge Inverter	5-Voc of module	Vdc
Maximum Output Current when connected to SolarEdge Inverter	15	Adc
Maximum Output Current when connected to Non-SolarEdge Inverter	10	Adc
Output in Standby mode with SolarEdge inverter or with SMI and Non-SolarEdge inverter (when disconnected from inverter or inverter off)	1	Vdc

STANDARD COMPLIANCE

Fire Safety	VDE-AR-E 2100-712:2013-05
PV Junction Box Safety	IEC62109-1 (class II safety, TUV-SUD), UL1741 (TUV-Rheinland & CSA)
PV Junction Box	EN50548 (TUV-SUD), UL3730 (TUV-Rheinland & CSA)

Premium Cells, Premium Modules

MECHANICAL DIAGRAMS

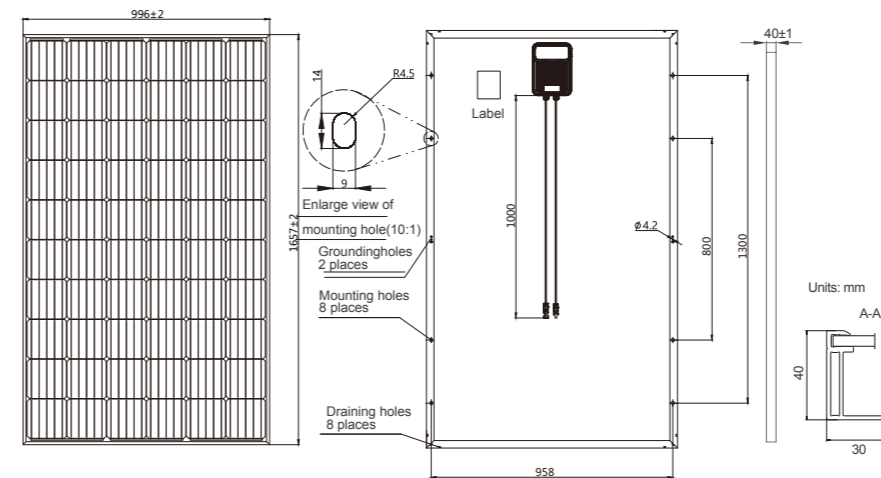

Remark: customized frame color and cable length available upon request

SPECIFICATIONS

Cell	Mono
Weight	18.9kg±3%
Dimensions	1657±2mm×996±2mm×40±1mm
Cable Cross Section Size	6mm ²
No. of cells	60(6x10)
Junction Box	Solar edge smart J-Box
Connector	MC4
Packaging Configuration	27 Per Pallet

ELECTRICAL PARAMETERS AT STC

TYPE	JAM60S14 -310/PR	JAM60S14 -315/PR	JAM60S14 -320/PR	JAM60S14 -325/PR	JAM60S14 -330/PR
Rated Maximum Power(Pmax) [W]	310	315	320	325	330
Open Circuit Voltage(Voc) [V]	40.30	40.53	40.78	41.04	41.30
Maximum Power Voltage(Vmp) [V]	32.60	32.89	33.17	33.44	33.75
Short Circuit Current(Isc) [A]	10.04	10.11	10.18	10.25	10.32
Maximum Power Current(Imp) [A]	9.51	9.58	9.65	9.72	9.78
Module Efficiency [%]	18.8	19.1	19.4	19.7	20.0
Power Tolerance	0~+5W				
Temperature Coefficient of Isc(α _{Isc})	+0.060%/°C				
Temperature Coefficient of Voc(β _{Voc})	-0.300%/°C				
Temperature Coefficient of Pmax(γ _{Pmp})	-0.370%/°C				
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G				

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types.

ELECTRICAL PARAMETERS AT NOCT


TYPE	JAM60S14 -310/PR	JAM60S14 -315/PR	JAM60S14 -320/PR	JAM60S14 -325/PR	JAM60S14 -330/PR
Rated Max Power(Pmax) [W]	229	233	237	241	244
Open Circuit Voltage(Voc) [V]	37.95	38.25	38.56	38.85	39.16
Max Power Voltage(Vmp) [V]	30.67	31.00	31.32	31.64	31.96
Short Circuit Current(Isc) [A]	7.93	7.97	8.01	8.05	8.09
Max Power Current(Imp) [A]	7.48	7.52	7.56	7.60	7.64
NOCT	Irradiance 800W/m ² , ambient temperature 20°C, wind speed 1m/s, AM1.5G				

OPERATING CONDITIONS


Maximum System Voltage	1000V DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	20A
Maximum Static Load,Front	5400Pa
Maximum Static Load,Back	2400Pa
NOCT	45±2°C
Application Class	Class A

CHARACTERISTICS


Current-Voltage Curve JAM60S14-320/PR



Power-Voltage Curve JAM60S14-320/PR



Current-Voltage Curve JAM60S14-320/PR

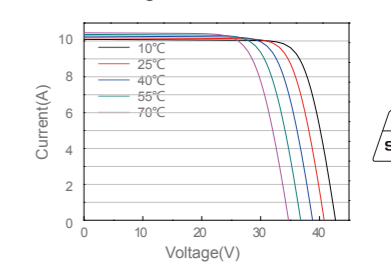

Optimized by solar edge